

FREIGHTLITE FREIGHTLIFTS

888-811-9876 www.Autoquip.com



TYPICAL APPLICATIONS

The FreightLite is a proven winner. It's made to smoothly and economically move loads weighing up to 6,000 lbs. from one level to another – typically to and from a mezzanine. The FreightLite is one of the best values in the industry. There's no pre-installation and set-up is quicker than competitive models.



Remote power supply



Velocity fuse for freefall prevention and safety



Sealed cam follower rollers

FEATURES & BENEFITS

Zero drift re-pressurization system

Keeps the platform from drifting when at upper level for extended periods

Lubricated-for-life composite bearings on all pivot points Maintenance free bearings, no greasing required

Turned, ground, polished and hard-chromed pins Extended bearing life

Solid steel construction Minimal platform deflection

Direct piston design No cables or chains to lubricate or adjust

Power unit with UL recognized components The very best components go into all Autoquip products

UL listed controls Dust, dirt, and drip resistant industrial enclosure

NEMA 12 pre-wired control box Industrial grade control enclosure

Relief valve Overload protection

Built and designed in accordance with ANSI B20.1 code Designed to meet or exceed all industry standards

Safety labels comply with ANSI Z535 Employee safety is enhanced

One year warranty Built to last and we back this up with the best Warranty in the industry

OPTIONS


- Gates and enclosures to meet customers requirements
- Specific state code packages
- Mast splice to meet installation conditions
- Optional on-load/off-load configurations

APPLICATIONS & MARKETS

- Mezzanine Applications
- Distribution Facilities
- Self-storage Or Mini Storage Facilities
- Auto Dealer Part Departments
- Retail Outlets
- Restaurants
- Hospitals

FREIGHTLITE FREIGHTLIFTS

888-811-9876 www.Autoquip.com

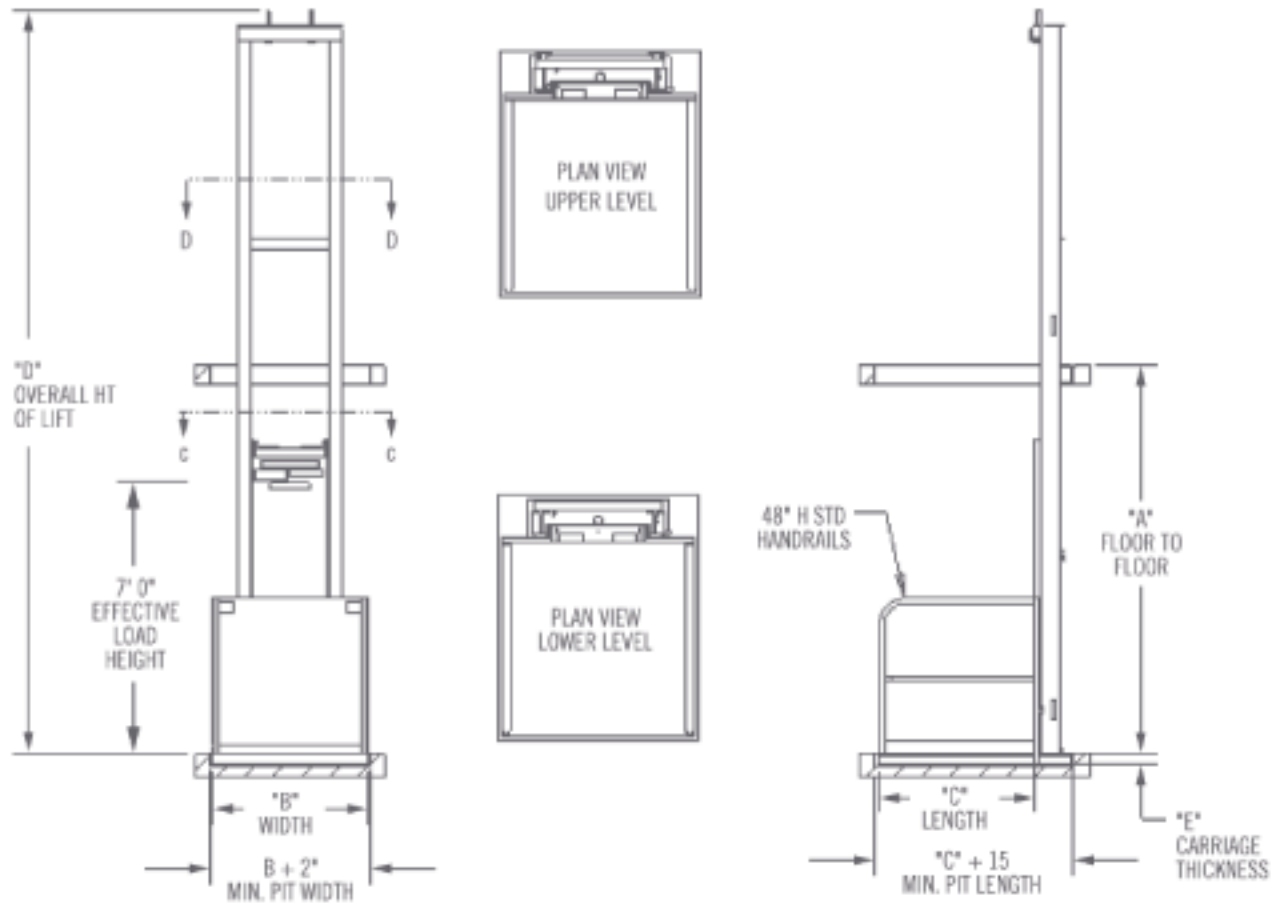

SPECIFICATIONS

MAX. TRAVEL (feet)	CAPACITY (pounds)	PLAT. MINIMUM width x length (in feet)	PLAT. MAXIMUM width x length (in feet)	HP minimum	SPEED fpm	MODEL
14	1,500	3 x 3	6 x 6	5	15	FLT-15
14	3,000	3 x 3	6 x 6	5	15	FLT-30