

HYDRAULIC STRADDLE FREIGHTLIFTS

888-811-9876 www.Autoquip.com



TYPICAL APPLICATIONS

Hydraulic Straddle Freightlifts are economical, easy to maintain and provide a safe way to move materials between two levels requiring less than 28 feet of vertical travel. Freightlifts are an economical alternative to forklifts or elevators with savings up to 75%.



10"–12" diameter sheaves provide large bend radius and longer cable life



Safety cams to limit platform freefall to less than 4"



Remote power supply

FEATURES & BENEFITS

Zero drift re-pressurization system Keeps the platform from drifting when at upper level for extended periods

Lubricated-for-life composite bearings on all pivot points Maintenance free bearings, no greasing required

Turned, ground, polished and hard-chromed pins Extended bearing life

Solid steel construction Minimal platform deflection

Five Sheave Cable Reaving Prevents side loading on the sheaves to greatly extend the life of the sheaves and cable

Swaged Cable Ends 100% cable strength, no cable clips or Crosby clips to adjust with this type connection

6x37, proof tested, pre-stretched wire rope Absolutely safe, durable, and long lasting

Power unit with UL recognized components The very best components go into all Autoquip products

Safety Cams Prevents platform freefall to less than 4 inches

UL listed controls Dust, dirt, and drip resistant industrial enclosure

NEMA 12 pre-wired control box Industrial grade control enclosure

Relief valve Overload protection

Built and designed in accordance with ANSI B20.1 code Designed to meet or exceed all industry standards

Safety labels comply with ANSI Z335 Employee safety is enhanced

One year warranty Built to last and we back this up with the best Warranty in the industry

OPTIONS


- Gates and enclosures to meet customers requirements
- Specific state code packages
- Mast splice to meet installation conditions
- Optional on-load/off-load configurations

APPLICATIONS & MARKETS

- Mezzanine Applications
- Distribution Facilities
- Self-storage Or Mini Storage Facilities
- Auto Dealer Part Departments
- Retail Outlets
- Restaurants
- Hospitals

HYDRAULIC STRADDLE FREIGHTLIFTS

888-811-9876 www.Autoquip.com

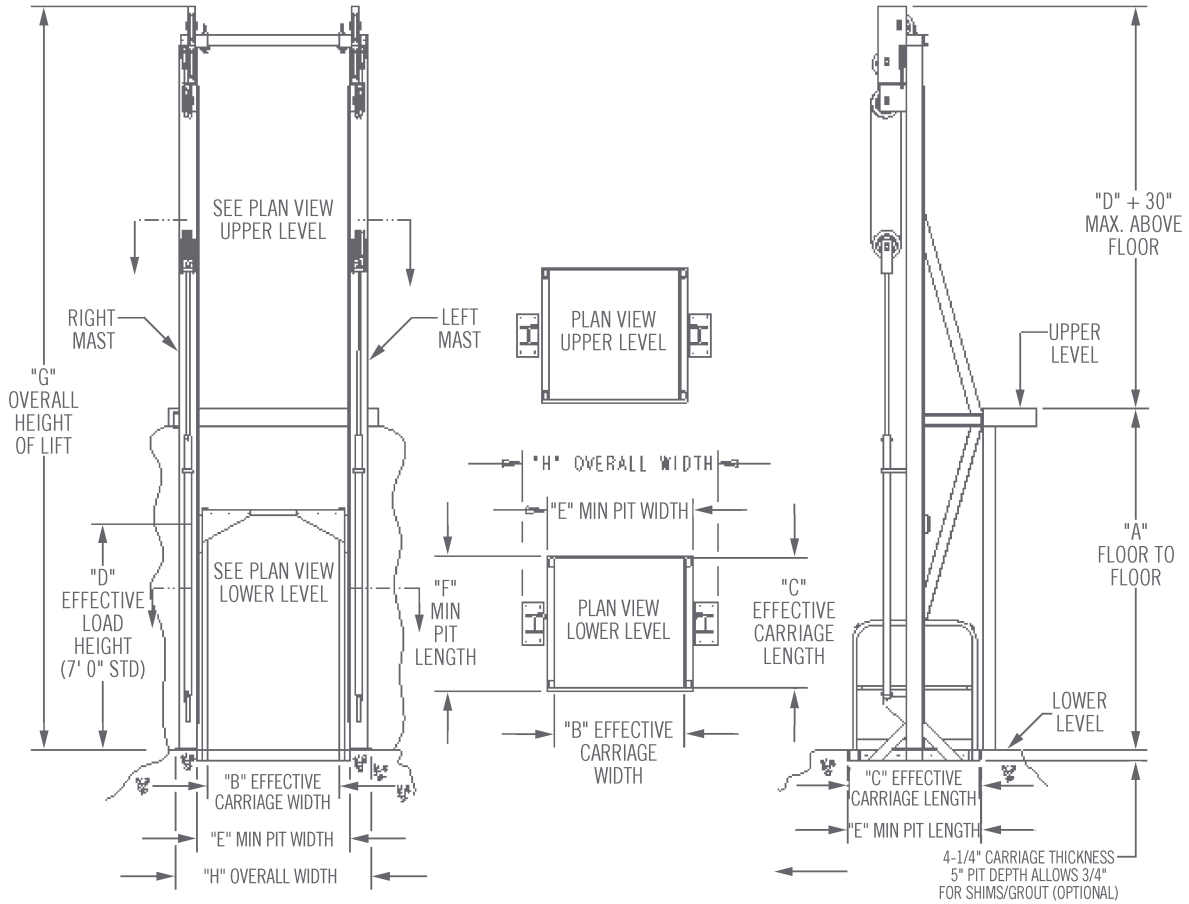

SPECIFICATIONS

MAX. TRAVEL (feet)	CAPACITY (pounds)	PLAT. MINIMUM width x length (in feet)	PLAT. MAXIMUM width x length (in feet)	HP minimum	SPEED fpm	MODEL
28	1,000	4 x 4	8 x 12	5	25	FLH-1
28	2,000	4 x 4	8 x 12	5	25	FLH-2
28	3,000	4 x 4	8 x 12	5	25	FLH-3
28	4,000	4 x 4	8 x 12	5	25	FLH-4
28	5,000	4 x 4	8 x 12	5	25	FLH-5
28	6,000	4 x 4	8 x 10	5	25	FLH-6